




## Specification sheet

# Diesel Generator Set K19 Series

400 kWe, 500 kVA Prime

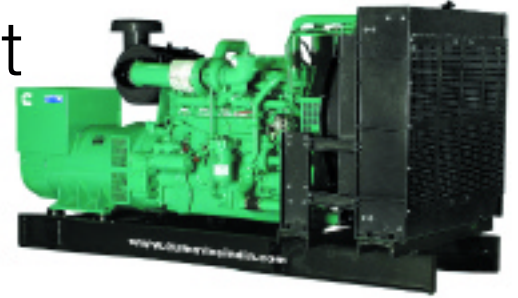

### Lowest life cycle cost

'K19 series' design features has made Cummins® diesel generator sets, the standard for comparison of operating economy, reliability and long life. When all cost factors like initial purchase, fuel, lube oil, maintenance etc. are considered, the bottom line will show that this Cummins® 'K19 series' will deliver the lowest life cycle cost.

### Heavy duty, durable and emission compliant

Cummins® 'K19 series' diesel engine comes with heavy duty features, a bigger size camshaft, optimized turbo-matching, electrical STC injectors and is yet compact in size with optimum power to weight ratio making it the obvious choice for your long-term power needs.

This genset powered by the reliable Cummins® 'K19 series' diesel engine meets stringent exhaust emission tests as per CPCB norms without sacrificing fuel efficiency at normal operating loads.



### Silent Power

Cummins® 500 kVA enclosures are designed so as to have optimum performance and serviceability over the complete operating range. The enclosures are compact with integral fuel tank and are designed for ease in maintenance. The powder coated enclosures are manufactured on latest CNC machines to ensure superior finish and durability.

### Single source power assurance

Design, manufacture and testing of engine, alternator and other accessories is done by Cummins India/ Channel partners (Powerica Limited) for optimum performance and is backed by a countrywide product support network with a single source responsibility for the entire package.

### Standard scope

**Engine:** Cummins® 'K19 series' direct injection, water cooled engine, 6 cylinder, in-line, 4 stroke, rated at 1500 RPM, conforming to ISO 3046 / BS 5514 has the following specifications:

- Cummins PT fuel pump
- Electrical Step Timing Control (ESTC) injector
- Holset turbocharger, pulse tuned exhaust manifold, stainless steel exhaust flexible connection
- Radiator or heat exchanger, coolant inhibitor, Low Temperature After cooling (LTA)
- Plate type lube oil cooler
- Spin-on filters - fuel, lube oil and by-pass
- Dry type replaceable paper element air cleaner with restriction indicator
- Flywheel housing and flywheel to suit single bearing alternator
- Starting motor – Electric, battery charging alternator
- First fill lube oil

**Alternator:** Stamford brushless alternator

- Self-excited, self regulated
- Class 'H' insulation
- Salient pole revolving field
- Single bearing
- Automatic voltage regulator

**Our energy working for you.™**

PGBU/CIL/008/K19 500 kVA/ Powerica /90deg./Dec. 2011/4000

[www.cumminspower.com](http://www.cumminspower.com)

### Accessories:

- Silencer suitably optimized to meet stringent sound emission standards as laid down by MOEF / CPCB
- Base rail with integral fuel tank is provided with a drain plug, air vent, inlet and outlet connections, level indicator, manhole etc.
- Sub-base fuel tank of 700 litres capacity
- 2 x 12 V dry, uncharged batteries with connecting leads and terminals

**Control panel:** Powder coated control panel manufactured with 14 / 16 gauge CRCA sheet provides:

- MCCB /ACB of suitable rating with overload and short circuit protection
- Voltmeter and ammeter with selector switch
- KW / PF meters
- Frequency meter
- KWh meter
- Indicating lamps for "Load On" and "Set Running"
- Current transformers
- Aluminium busbars of suitable capacity with incoming and outgoing terminations
- Instrument fuses duly wired and ferruled

**PowerCom® controller:** A Cummins manufactured microprocessor based genset controller for metering, monitoring, protecting and electronic governing of the engine.



### PowerCom® features:

- Engine electronic governing
- Genset metering parameters like lube oil pressure, coolant temperature, engine speed (rpm), run hours, DC voltage, intake manifold temperature (wherever applicable), 3 phase volts and 3 phase amperes, frequency, kW, kVA, power factor
- Engine protection for low lube oil pressure, high coolant temperature (alarm and shutdown)
- Alternator protection parameters like under voltage, over voltage, over frequency, over current, under frequency (alarm and shutdown)
- Relay drivers for remote annunciations
- Cyclic cranking
- Auto/ manual start/ stop
- Alternator trim adjustment from the front key pad
- Model specific calibration from the front key pad
- Speed bias or raise/ lower inputs are provided for paralleling
- Remote monitoring capability through separate interface modules
- 6 configurable discrete outputs
- 2 configurable discrete inputs
- Smooth transition to rated speed

- Smart start algorithm
- Housed in a NEMA 3R/IP 53 non-metallic enclosure
- Operates within a wide temperature range (0-60 degrees C) and humidity up to 95%

### Acoustic enclosure:



- Specially designed to meet stringent MOEF/ CPCB norms of 75 dBA @ 1mtr at 75% load under free field conditions
- Designed to have optimum serviceability
- Air inlet louvers specially designed to operate at rated load even at 50 deg C air inlet temp.
- Made on special purpose CNC machines for consistency in quality and workmanship
- Powder coated for long lasting service life and superior finish
- With UV resistant powder coating, can withstand extreme environment
- Use of stainless steel hardware
- Insulation material meets exacting IS 8183 specs for better attenuation

### Optionals

**Engine:** Heavy duty air cleaner, lube oil / coolant heater with thermostatic switch

**Alternator:** Thermistors, PMG excitation, space heater

**Control panel:** "PowerCommand® Control Panel (PC 3.3)" for microprocessor based governing, regulation, metering, monitoring and auto synchronising control system. AMF control panel, battery charger, remote/ auto start panel, auto/ manual synchronizing panel and audio/ visual annunciation for faults.

**Others:** Mobile sets with canopy

**Our energy working for you.™**

PGBU/CIL/008/K19 500 kVA/ Powerica /90deg./Dec. 2011/4000

[www.cumminspower.com](http://www.cumminspower.com)

## Technical data

### Generator set specifications

Model	CP500 D5 P
Prime Power Rating kVA	500
Output Voltage and Frequency	415 Volts, 50 Hz
Power Factor	0.8 (lag)
No. of phases	3 phase

### Engine specifications

Make	Cummins
Model	KTA 19 G-9
No. of cylinders	6, in-line
Aspiration	Turbocharged-Aftercooled
Bore x Stroke	159 mm x 159 mm
Displacement	18.9 ltrs
Output - Prime	448 kWm
Fuel consumption @ 75% load with Radiator & Fan	77.4 ltr/hr
Fuel consumption @ 100% load with Radiator & Fan	101.8 ltr/hr
Typical lube oil consumption @ full load	0.12 ltr/hr
Total wet weight ( engine + radiator )	2687 kg
Length x Width x Height (engine)	1970 x 1092 x 1510 mm
Compression Ratio	13.9 : 1
Piston Speed	7.95 m/s
Governor / Class	Electronic / A1
Lubricating oil sytem capacity	55 ltrs
Coolant capacity (engine + radiator)	175 ltrs
Combustion air intake @ 100% load (+/- 5%)	32.7 m <sup>3</sup> /min
Fan air flow across radiator	1217 m <sup>3</sup> /min
Exhaust Temperature	538 °C

### Alternator specifications

Make	Stamford
Frame size / Model No.	HC5D
Voltage Regulation	± 1.0%
Insulation	Class H
Standard Enclosure	IP 23
Winding Pitch	2 / 3 Pitch
Stator Winding	Double layer lap
Rotor	Dynamically balanced
Wave form distortion	No load < 1.5%, non distorting balanced linear load < 5 %
Telephone Interference Factor	Better than 50
Total Harmonic Factor	Better than 2%

### Conformance standards

IS 4722, BS 5000, IS 1460, ISO 8528, BS 5514, ISO 3046

### Rating definitions


Prime Power (PRP):

Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.

- Fuel consumption data is based on diesel having specific gravity of 0.85 and conforming to IS:1460
- Oil consumption data is based on oil having specific gravity of 0.89 and meeting CH4 API categories
- Fuel consumption tolerance is +5%

## Typical enclosed genset dimensions\*

Genset Model	Rating (kVA)	Length (mm)	Width (mm)	Height (mm)	Weight (kgs.) (Wet)	Std. Fuel Tank Capacity (Ltrs)
CP500 D5 P	500 kVA	6500	2000	2300	9045	700

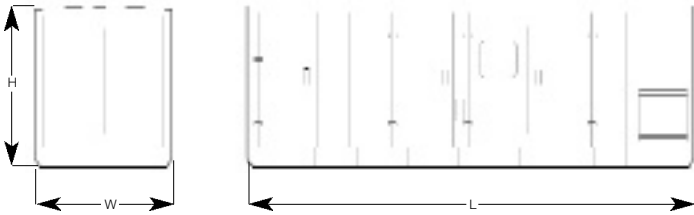

### Powerica Limited

9th Floor, Bhaktawar, Nariman Point.

Mumbai 400 021

Tel.: (022) 665 62525

Fax.: (022) 4001 2692/ 2756 6239

Email: atp@powericaltd.com Web: www.powericaltd.com

### Powerica Ltd. - Regional and branch offices:

Location:	Tel:	Fax:
Ahmedabad	(079) 2646 8550	(079) 2646 8550
Aurangabad	(0240) 6601921	(0240) 6601922
Bangalore	(080) 4123 5741/ 2/ 4123 5777	(080) 2225 8649
Chennai	(044) 2826 0281/ 4214 4394-96/ 2826 0281	(044) 2826 0281/ 4214 4394-6
Coimbatore	(0422) 249 5125/ 249 6126	(0422) 249 5125
Goa	(0832) 243 8587/245 4381	(0832) 243 8587/ 245 4381
Gurgaon	(0124) 411 1051/ 2	(0124) 411 1051
Hospet	(0839) 423 0216	
Hubli	(0836) 227 1262	(0836) 227 1013
Hyderabad	(040) 4477 3000 / 4477 3009	(040) 4477 3010
Kochi	(0484) 235 3595/ 236 5906	(0484) 236 5906
Kolhapur	(0231) 661 1501	(0231) 661 1502
Kolkatta	(033) 2287 0331/ 3022 2331	(033) 2287 0331
Madurai	(0452) 420 0081/ 2	(0452) 420 0082
Mumbai	(022) 6656 2525	(022) 4315 2515
Nagpur	(0712) 6464 492/ 645 4117	(0712) 252 6868
Nasik	(0253) 329 9349/ 257 6779	(0253) 257 6779
Pune	(020) 4146 4800	(020) 4146 4899
Vijaywada	(0866) 257 0792/ 257 9435/ 662 2752	(0866) 662 2752
Vishakapatnam	(0891) 273 9793	(0891) 273 9794

### Cummins India Limited

Power Generation Business Unit,

35A/1/2, Erandawana, Pune 411 038. India

Tel.: (91) 020-3024 8600 Fax: (91) 020-6602 8090

### Cummins Power Generation Offices

Location:	Tel:	Fax:
Bangalore:	(080) 2361 3831/ 2361 1958	(080) 2361 4552
Chennai:	(044) 2446 8110/ 2446 8113	(044) 2491 1120
Gurgaon:	(0124) 391 0900/ 01	(0124) 391 0916
Hyderabad:	(040) 2766 3017/ 2767 8891	(040) 2767 8892
Jaipur:	(0141) 236 4944	(0141) 403 8794
Kolkata:	(033) 2287 8065/ 2287 2481	(033) 2290 3839
Lucknow:	(0522) 230 5049/ 230 5059	(0522) 230 5035
Mohali:	(0172) 224 0371/ 72/ 73	(0172) 224 0371/ 72/ 73
Vadodara:	(0265) 232 4207/ 654 0390	(0265) 308 3010

Authorised  
Representative

### Our energy working for you.™

©2011 Cummins Power Generation Inc. All rights reserved.

Cummins Power Generation and Cummins are registered trademarks of Cummins Inc.

PowerCommand, AmpSentry, InPower and "Our energy working for you." are trademarks of Cummins Power Generation.

Other company product or service names may be trademarks or service marks of others.

Specifications are subject to change without notice.

PGBU/CIL/008/K19 500 kVA/ Powerica /90deg./Dec. 2011/4000



www.cumminspower.com